
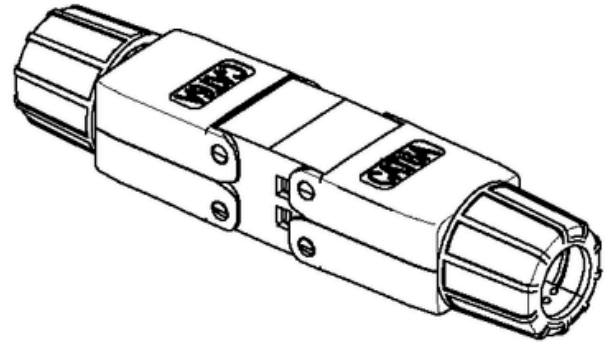
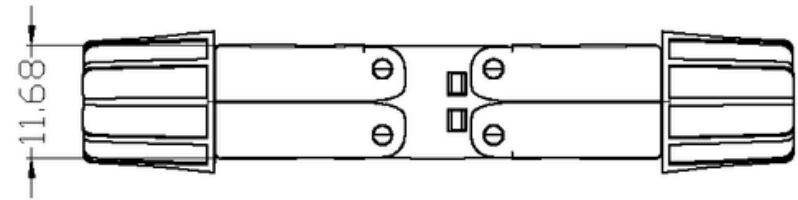
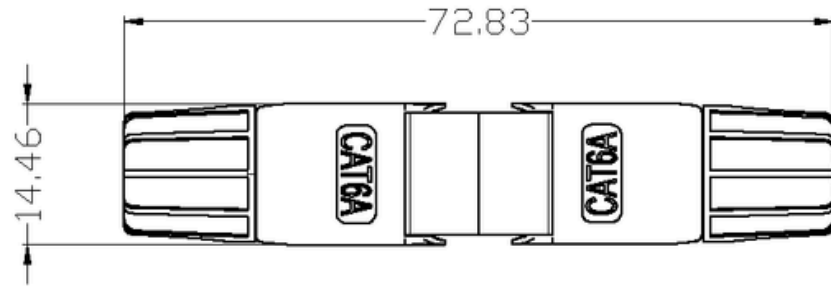


REV	DATE	MODIFICATION	DRAWN



TYPE:
 1. RJ45 CAT6A SHIELDED TOOLLESS COUPLER
 2. COLOUR: SILVER

CABLE MATCHED:
 1. SOILD AND STRANDED
 2. 22AWG/23AWG/24AWG

ELECTRICAL:
 1. CONTACT RESISTANCE: 20m OHM
 2. INSULATION RESISTANCE: $\leq 500M$ OHM @100 V DC
 3. WITHSTAND VOLTAGE: DC1000V AC700V RMS 60HZ, I MIN
 4. CAT6A PERMANENT LINK: CONFORM TO ANSI/TIA/EIA 568B. 2-10

ENVIRONMENTAL:
 1. STORAGE: -40°/ +70°
 2. OPERATION: -10°/ +60°

CHANICAL:
 1. PLASTIC MATERIAL: NEW PC
 2. GOLD PINS: PHOSPHOR BRONZE, GOLD PLATING 3U"
 3. TERMINAL PINS: PHOSPHOR BRONZE, ZIN PLATING
 4. RJ45 CONTACT LIFE: 750 TIMES MIN
 5. IDC TERMINAL LIFE: 250 TIMES MIN

		DIMENSION IN mm (Inch)		MATERIAL	DWG NO. WT-6091-STP-CAT.6A
		TOLERANCE UNLESS OTHERWISE SPECIFIED			
,X ± 0,10	,X ± 5°	TITLE Emenda STP Tooless Cat.6A / Cat.7			
,XX ± 0,05	,XX ± 2°				
APPROVAL	CHECKED	DRAWN	SCALE	SHEET	
			PROJ.	REV	